




20-Ton Tag-A-Long



20-Ton, Tandem Axle, Tag Along Trailer

This Specification is for a GTTU202-37-24, 20-Ton, Tandem Axle, Tag Along Trailer. With a Maximum Capacity of 40,000 lbs and a Shipping Weight of 9,200 lbs +/- 3%.

Dimensions:		Frame:	
Overall Length:	36' 8"	Main Beam:	14" @ 30 I-Beam
Deck Length:	24'	Cross Member:	4" Jr. I-Beams on 12" Centers
Tongue:	5' 2"	Side Rails:	8" channel
Beavertail:	5'	Bumper:	10" channel
Total Width:	8' 6"	Header:	8" channel
Height:	34"		

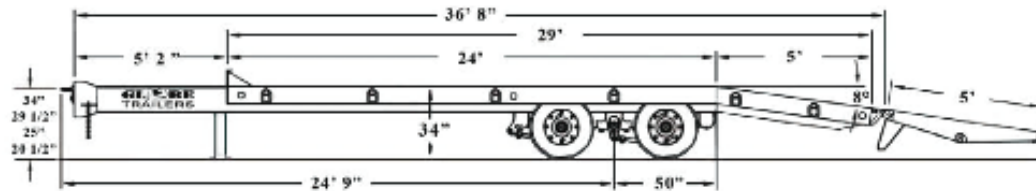

Draw Bar Tongue: Length 62", heavy duty 3" pintle eye, with 4 adjustable height positions. 2 safety chains centered at 24". Tool Box: Lockable, located at front of trailer with vehicle anti-theft provisions included.

Ramps: 2-ea 24" x 60" adjustable, with spring assists and safety chains.

Axles: 2-ea 25,000 lb capacity.

Landing Gear: 2 speed landing gear, static load capacity 160,000 lbs, lifting capacity 50,000 lbs, side capacity 29,000 lbs.

Wheels & Tires: Tires: 8-ea 235/75R x 17.5 "H" load range, steel belted radials.

Wheels: 8-ea. 6.75 x 17.5, 8 hole hub piloted steel disc wheels.

Brakes: 12 1/4" x 7 1/2" air brakes w/ automatic slack adjusters, ABS system 30/30 spring parking brakes w/ ABS 2S1M system.

Suspension: Heavy duty tandem-axle spring ride suspension.

Electrical: 12-Volt electrical system w/ standard 7 way SAE connector, All lighting LED in rubber grommet mountings to DOT specifications.

Tie Down: 12 "D" rings, 6 on ea side.

Deck: 2" oak, secured with 5/16" self-taping torque screws, 1/4" smooth plate with grouser bars on beavertail and 1/4" diamond plate over wheels.

Finish: Powdercoated to color of choice

Oficina Comercial: Badajoz 100 Of. 1117 - ☎ +56 (2) 32026730 - 📠 +56 (9) 78465444